



# Domekt R 350 V C8

|                                                                 |               |
|-----------------------------------------------------------------|---------------|
| Maximal air flow, m³/h                                          | 352           |
| Maximal air flow, l/s                                           | 98            |
| Reference flow rate, m³/s                                       | 0,068         |
| Reference pressure difference, Pa                               | 50            |
| SPI, W/(m³/h)                                                   | 0,28          |
| Thermal efficiency of heat recovery, %                          | 86            |
| Electric air heater capacity, kW / Δt, °C                       | 0,5/5,9       |
| Supply voltage, V                                               | 1~230         |
| Maximal operating current HE, A                                 | 4,3           |
| Power supply cable, mm²                                         | 3×1,5         |
| Electric power input of the fan drive at maximum flow rate, W   | 103           |
| Electric power input of the fan drive at reference flow rate, W | 37            |
| Noise power level, L <sub>WA</sub> , dB(A)                      | 36            |
| Noise pressure level, L <sub>PA</sub> , dB(A), (3 m)            | 26            |
| Filters dimensions BxHxL, mm                                    | 428×204×46    |
| Supply filter class                                             | ePM1 60 (F7)  |
| Exhaust filter class                                            | ePM10 50 (M5) |
| Unit dimensions BxHxL, mm                                       | 494×512×598   |
| Maintenance space, mm                                           | 600           |
| Unit weight, kg                                                 | 45            |



## Performance

Unit with standard equipment

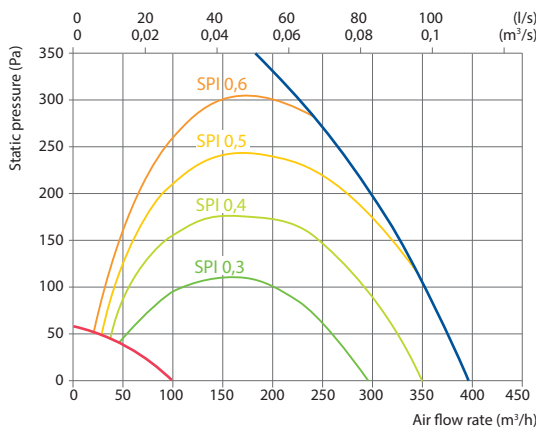

## Accessories



|                      |                          |
|----------------------|--------------------------|
| Closing damper       | AGUJ-M-160+TF230/CM230   |
| Silencer             | ODA/EHA ASTS-160-600-M   |
|                      | SUP/ETA ASTS-160-900-M   |
| Water heater         | DH-160                   |
| PPU                  | PPU-HW-3R-15-0,4-W2      |
| 2-way valve (heater) | VVP47.10-0,4+SSF161.05HF |
| Water cooler         | DCW-0,4-3                |
| 2-way valve (cooler) | VVP47.10-1,6+SSF161.05HF |
| Outdoor grill        | LD-160                   |
| Water heater-cooler  | DHCW-160                 |
| DX cooler            | DCF-0,4-3                |
| Cooling unit         | MOU-12HFN8a+ KA8142      |

## Temperature efficiency


|                          | Winter |      |      |      |      | Summer |      |      |
|--------------------------|--------|------|------|------|------|--------|------|------|
| Outdoor temperature, °C  | -23    | -15  | -10  | -5   | 0    | 25     | 30   | 35   |
| After heat exchanger, °C | 15,6   | 16,7 | 17,4 | 18,1 | 18,9 | 22,4   | 23,1 | 23,9 |

indoor +22 °C, 20 % RH

Shown as right (R1)

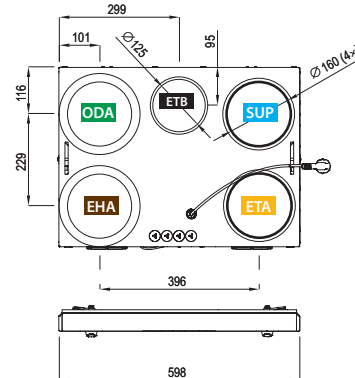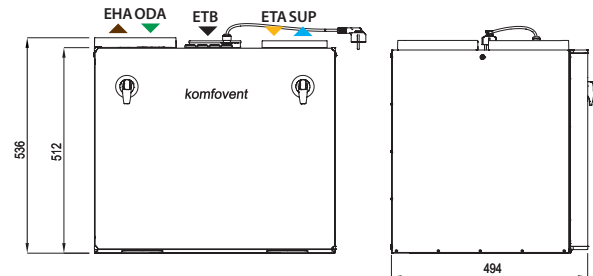

Shown as left (L1)



▶ ODA – outdoor intake
 ▶ SUP – supply air
 ▶ ETA – extract indoor
 ▶ EHA – exhaust air
 ▶ ETB – additional extraction connection (by-pass – extraction without heat recovery)